









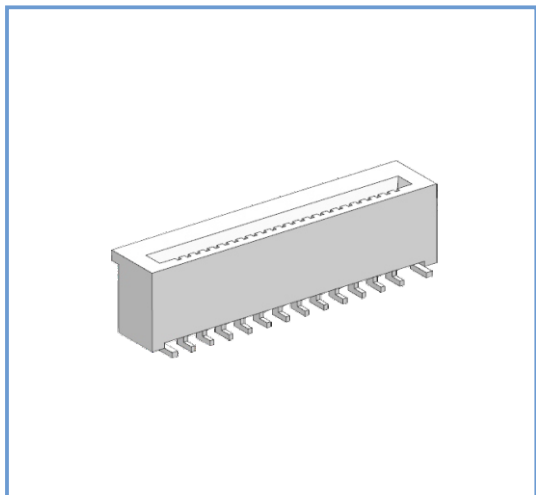


◆ 选型 Type Selection

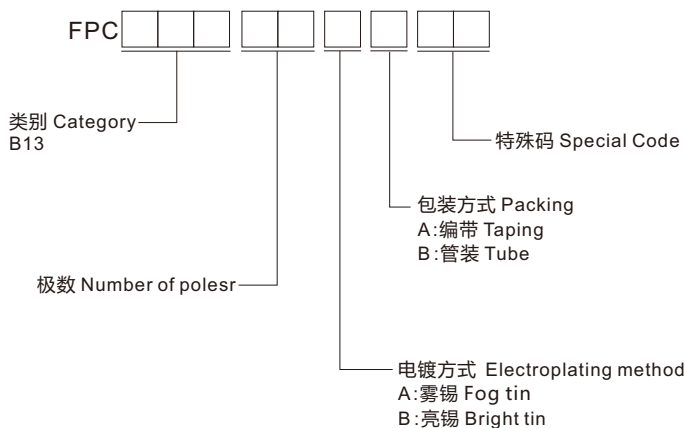

◆ 图表 Diagram

■ 0.5立式无盖正脚H=4.0

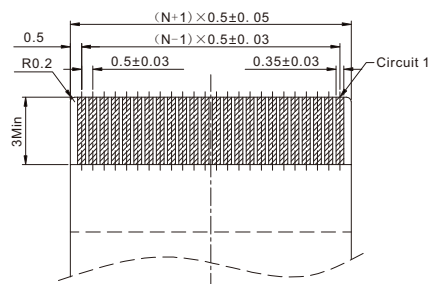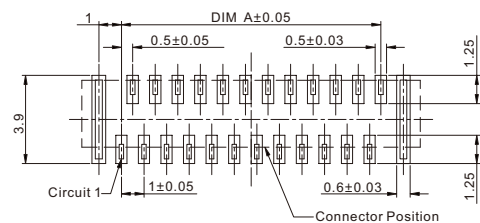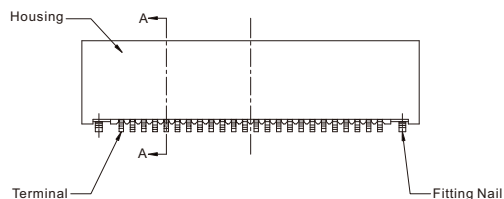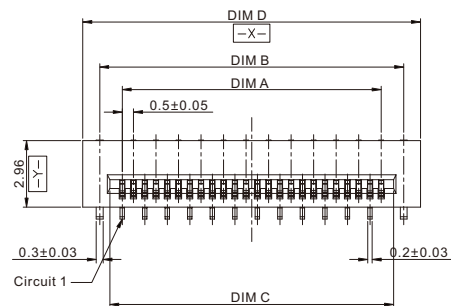

◆ 规格 Specifications

- 极数 Number of poles: 4~60
- 工作温度 Working Temperature: -40°C~+85°C
- 额定电压 (最大) Voltage rating(max): 1250V,AC
- 接触电阻 Contact resistance: $\leq 0.02\Omega$
- 绝缘电阻 Insulation resistance: $\geq 100M\Omega$
- 目前评级 Current rating: 1.0A
- 耐压 Withstand voltage: 250VAC(rms)

◆ 材质 Material

- 端子 Terminal: 铜合金 Copper Alloy
- 外壳 Housing: LCP

CKTS	尺寸 Size(mm)			
	DIM A	DIM B	DIM C	DIM D
6	2.50	4.50	3.60	6.00
7	3.00	5.00	4.10	6.50
8	3.50	5.50	4.60	7.00
9	4.00	6.00	5.10	7.50
10	4.50	6.50	5.60	8.00
11	5.00	7.00	6.10	8.50
12	5.50	7.50	6.60	9.00
				