



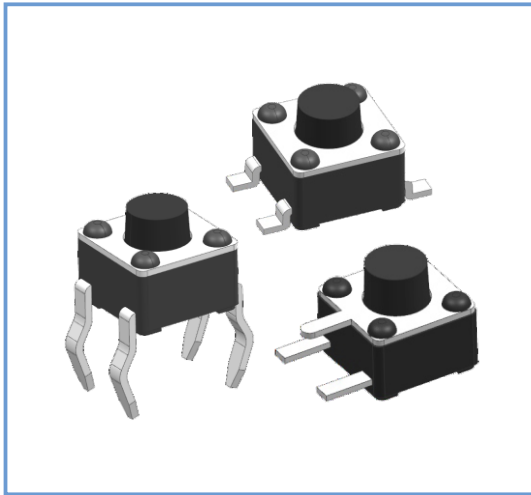

◆ 选型 Type Selection

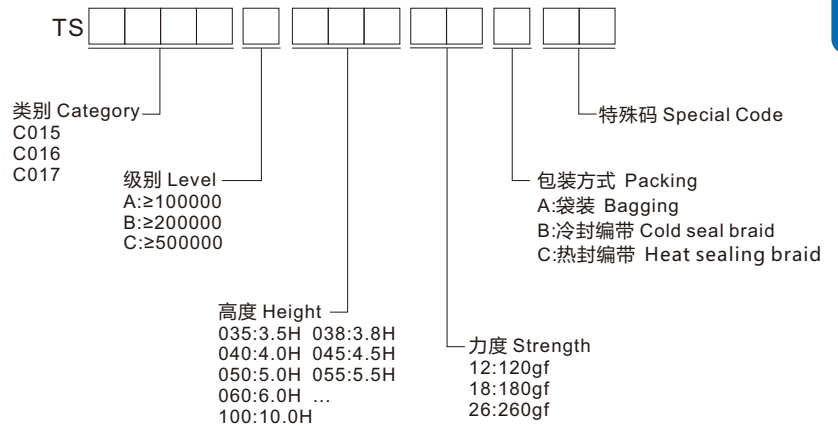

◆ 规格 Specifications


- 使用温度 Operating temperature : $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 最大额定值 Maximum rating : 50mA 12V DC
- 最小额定值 Minimum rating : 10 μ A 1V DC
- 接触电阻 Contact resistance : $\leq 100\text{m}\Omega$
- 绝缘电阻 Insulation resistance : $\geq 100\text{M}\Omega$
- 耐电压 Withstand voltage : 250V AC

◆ 材质 Material


- 接触点 Contact point : 铜合金 Copper alloy
- 本体 Ontology : PPA/LCP
- 弹片 shrapnel : 不锈钢 Stainless steel
- 盖板 Cover : 铁/铜合金 Iron/copper alloy
- 按钮 Button : PPA/LCP

◆ 图表 Diagram

■ TS-C015

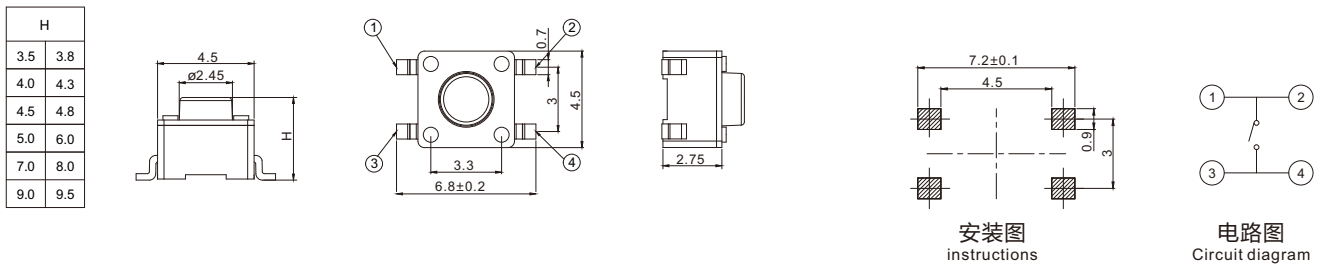

■ TS-C016

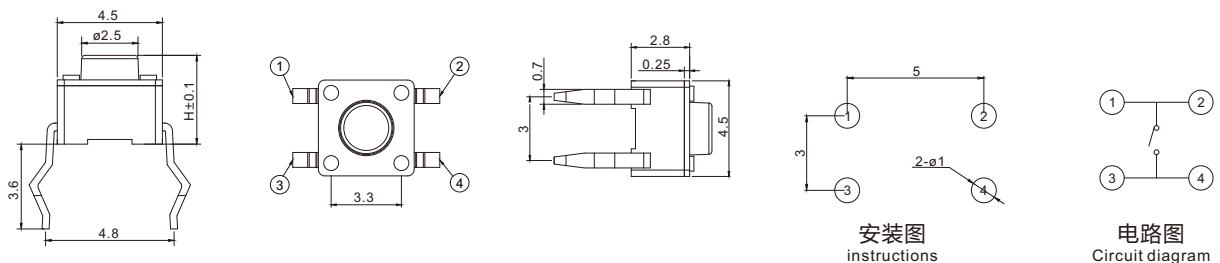

■ TS-C017

