



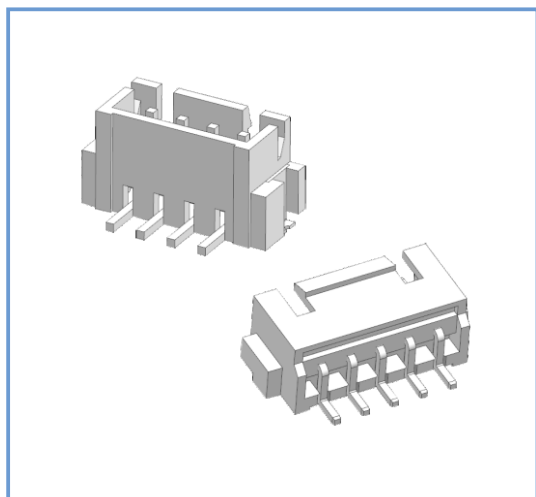


## ◆选 型 Type Selection

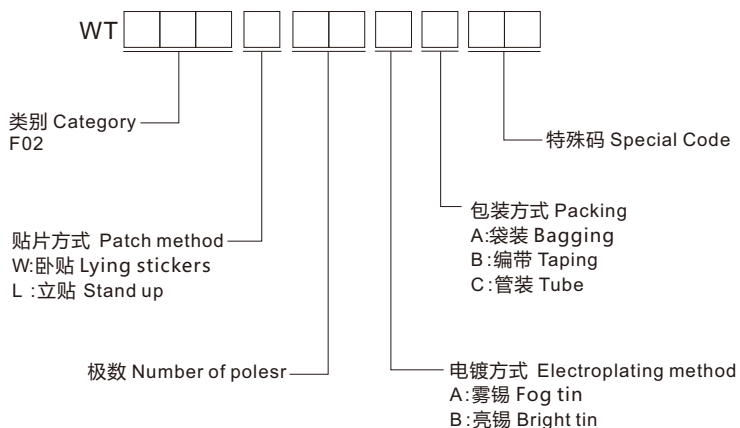


## ◆图 表 Diagram

### ■ XHB-2.54立贴 Stand up

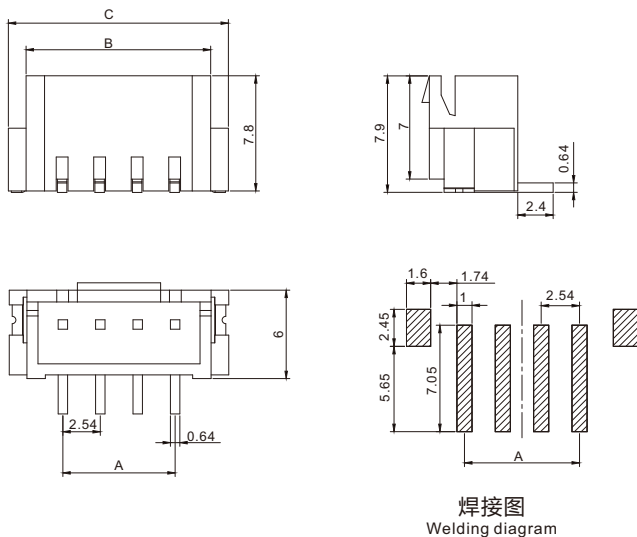

### ■ XHB-2.54卧贴 Lying stickers

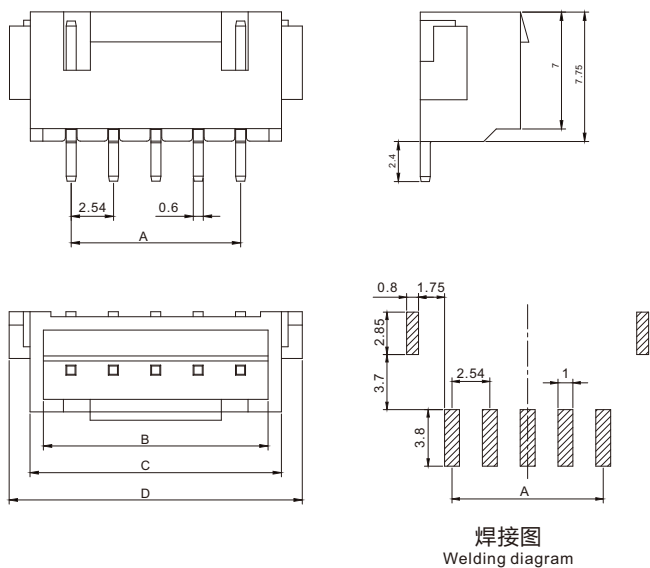

## ◆规 格 Specifications

- 极数 Number of polesr : 2~20
- 工作温度 Working Temperature : -40℃~+85℃
- 额定电压 (最大) Voltage rating(max) : 1250V,AC
- 接触电阻 Contact resistance :  $\leq 0.02\Omega$
- 绝缘电阻 Insulation resistance :  $\geq 100M\Omega$
- 目前评级 Current rating : 1.0A
- 耐压 Withstand voltage : 250VAC(rms)

## ◆材 质 Material

- 端子 Terminal: 铜合金 Copper Alloy
- 外壳 Housing: LCP/PPA

### ■ XHB-2.54立贴 Stand up

| CKT | 尺寸 Size(mm) |       |       |
|-----|-------------|-------|-------|
|     | A           | B     | C     |
| 2P  | 2.54        | 7.5   | 10.0  |
| 3P  | 5.08        | 10.0  | 12.5  |
| 4P  | 7.62        | 12.5  | 15.0  |
| 5P  | 10.16       | 15.0  | 17.5  |
| 6P  | 12.70       | 17.5  | 20.0  |
| 7P  | 15.24       | 20.0  | 22.5  |
| 8P  | 17.75       | 22.5  | 25.0  |
|     | .....       | ..... | ..... |

### ■ XHB-2.54卧贴 Lying stickers

| CKT | 尺寸 Size(mm) |       |       |       |
|-----|-------------|-------|-------|-------|
|     | A           | B     | C     | D     |
| 2P  | 2.54        | 5.84  | 7.44  | 9.94  |
| 3P  | 5.08        | 8.38  | 9.98  | 12.48 |
| 4P  | 7.62        | 10.92 | 12.52 | 15.02 |
| 5P  | 10.16       | 13.46 | 15.06 | 17.56 |
| 6P  | 12.70       | 16.00 | 17.60 | 20.10 |
| 7P  | 15.24       | 18.64 | 20.14 | 22.64 |
| 8P  | 17.78       | 21.08 | 22.68 | 25.18 |
|     | .....       | ..... | ..... | ..... |