


## ◆ 选型 Type Selection

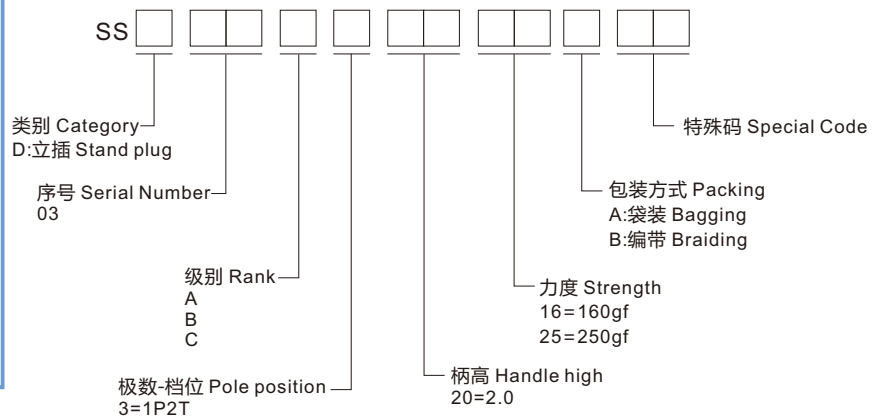

## ◆ 规格 Specifications




- 接触额定值 Contact Rating : 0.3A 4V DC
- 接触电阻 Contact Resistance :  $\leq 100m\Omega$
- 绝缘电阻 Insulation Resistance :  $\geq 100M\Omega$ .500V DC
- 电介质 Dielectric :  $\geq 500V$  AC/1 minute
- 电气寿命 Electric Life :  $\geq 10000$ cycles
- 工作温度 Operating Temp :  $-20^{\circ}C \sim +70^{\circ}C$
- 存储温度 Storage Temp :  $-40^{\circ}C \sim +85^{\circ}C$

## ◆ 材质 Material



- 触点 Contacts : 铜合金 Copper Alloy
- 本体 Ontology : PPA/LCP
- 外壳 Housing : 铜合金 Copper Alloy
- 按钮 Button : PPA

## ◆ 图表 Diagram

### ■ SSD03A320

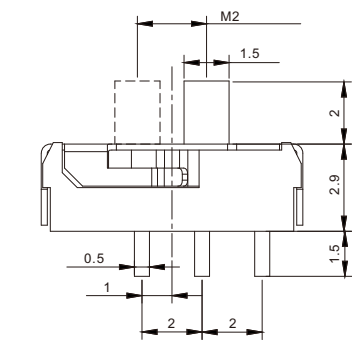

电路图  
Circuit diagram

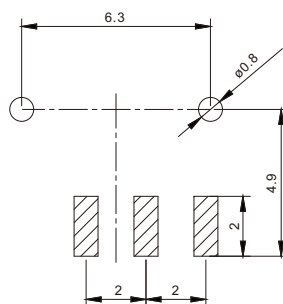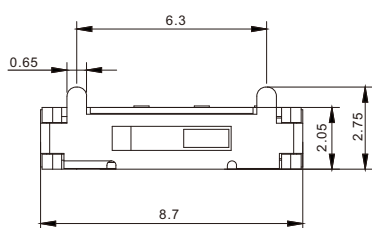

安装图  
instructions