



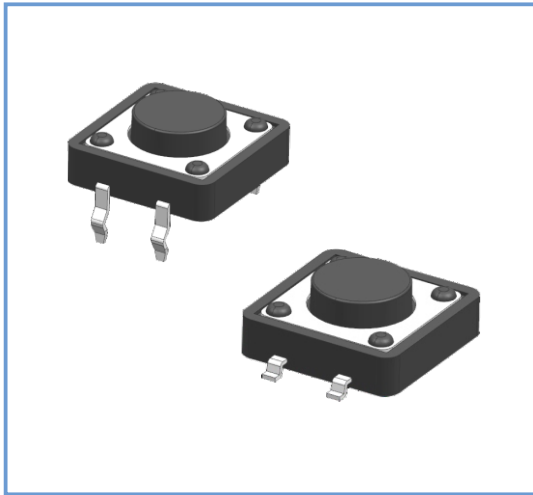

◆选 型 Type Selection

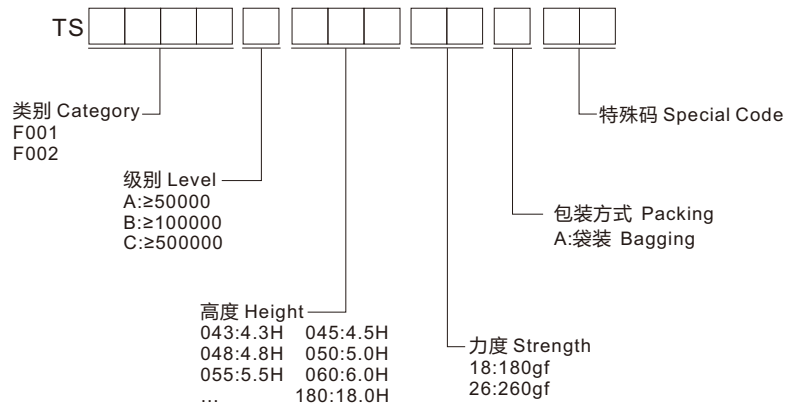

◆规 格 Specifications

- 使用温度Operating temperature : -20℃~+80℃
- 最大额定值Maximum rating : 50mA 12V DC
- 最小额定值Minimum rating : 10μA 1V DC
- 接触电阻Contact resistance : ≤100mΩ
- 绝缘电阻Insulation resistance : ≥100MΩ
- 耐电压Withstand voltage : 250V AC





◆材 质 Material

- 接触点Contact point : 铜合金Copper alloy
- 本体Ontology : PPA/LCP
- 弹片shrapnel : 不锈钢Stainless steel
- 盖板Cover : 铁/铜合金Iron/copper alloy
- 按钮Button : PPA/LCP


◆图 表 Diagram

■TS-F001

H	
4.3	4.5
5.0	5.5
...	...
18.0	18.5
19.0	19.5

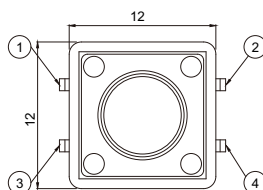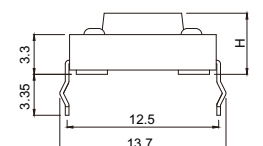





安装图
instructions




电路图
Circuit diagram

■TS-F002

H	
4.3	4.5
5.0	5.5
6.0	6.5
...	...
18.0	18.5
19.0	19.5

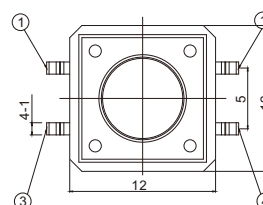

安装图
instructions



电路图
Circuit diagram